


# Products for Laser and Optical Packaging

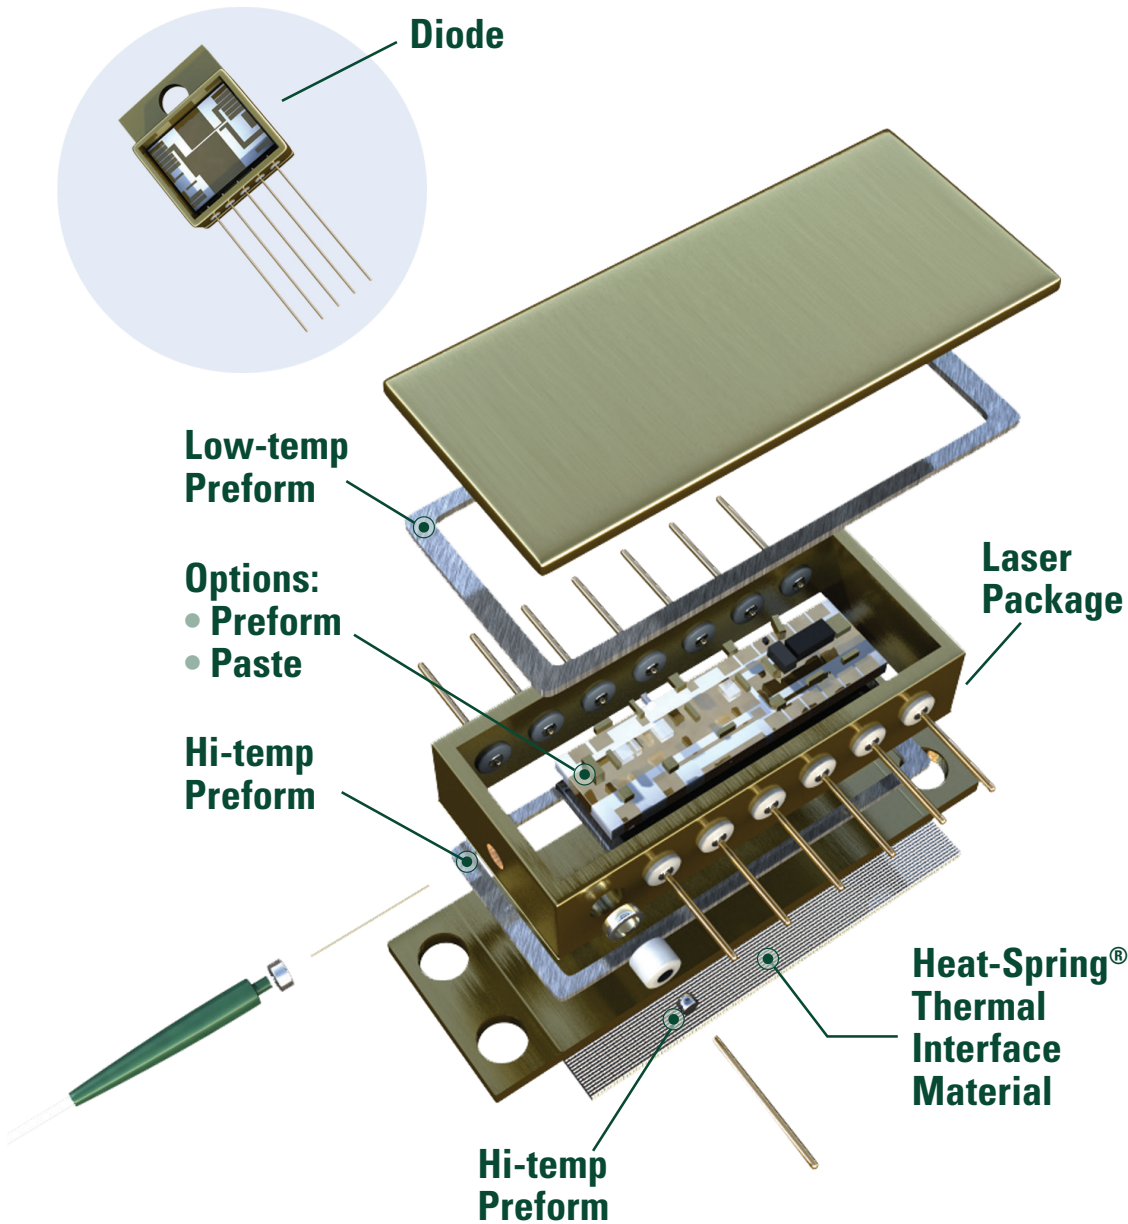

Indalloy®/ Temperature (Lowest to Highest)	
1E	(52In/48Sn) 118°C
281	(58Bi/42Sn) 138°C
282	(57Bi/42Sn/1Ag) 139–140°C
290	(97In/3Ag) 143°C
106	(63Sn/37Pb) 183°C
256	(96.5Sn/3Ag/0.5Cu) 217–220°C
121	(96.5Sn/3.5Ag) 221°C
121	(90Sn/10Sb) 243–257°C
182	(80Au/20Sn) 280°C
151	(92.5Pb/5Sn/2.5Ag) 287–296°C
183	(88Au/12Ge) 356°C
184	(96.8Au/3.2Si) 363°C
193	(72Ag/28Cu) 780°C

Contact our engineers today: [askus@indium.com](mailto:askus@indium.com)

Learn more: [www.indium.com](http://www.indium.com)

**From One Engineer To Another®**

©2018 Indium Corporation

Form No. 99262 R0

